




# Hot Slag Application

1300-1600°C

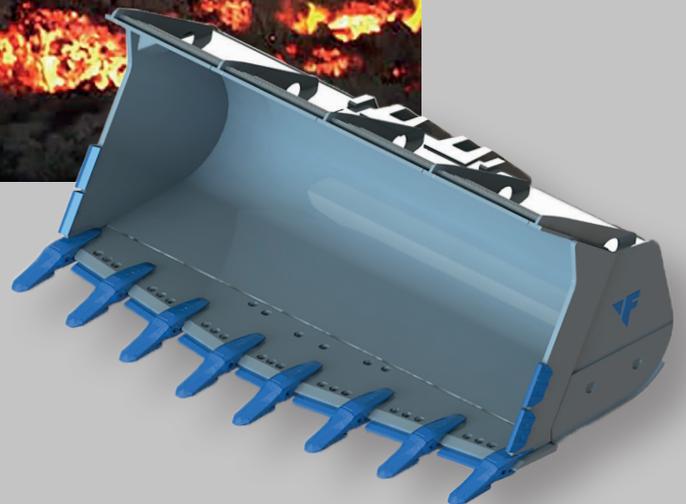

Feurst – Bd de la Boissonnette  
42110 Feurs – France  
Tél +33 (0)4 77 27 40 63  
[sales@safe-feurst.fr](mailto:sales@safe-feurst.fr)



# BENEFITS

Self hardening steel provides Hot slag ORYX parts with proper necessary mechanical characteristics.

In the most challenging working conditions, ORYX parts deliver maximum performance and long service life.

All-metal pin & washer goes well to high temp strength.

Special impact fitting tool with offset striking handle help for easy and safety handing.

Extra longlife system:

- Conical geometry assembly adapter/tooth
- Lateral ears provide excellent load transfer
- Locking devices for total safety

Thanks to their self-sharpening shape, ORYX teeth retain their sharp profile right up to the point of extreme wear, guaranteeing better penetration of the material while reducing machine stress.



## Performance & Safety Service

- *Handling Hook*
- *Offset handling impact tool*
- *Full metal hot temp resistance looking device*
- *Thick checkerboard sole tooth design*
- *Self sharpening tooth*
- *Optimized upper & under adapter legs*
- *Double conical nose and tooth ears fitting*
- *> 500 HB tooth > 16 joule @ 40 °C*
- *Self hardening steel*



## Reduction of operating costs (T.C.O\*)

- *Optimized shape tooth wear ratio* **up to 75%**
- Less change over
- *Bucket life time adaptors & wear caps* 
- Less downtime
- *Bucket loading optimization*
- Better productivity

## Brand & Model Equipment

Machine	32 (7 Kits)	adapter center distance (min/ max)	32 (8 Kits)	adapter center distance (min/ max)	34 (8 Kits)	adapter center distance (min/ max)
CAT	972 / 973	470 / 595	980/988	470 / 595	990/992	550 / 750
HITACHI	ZW 370-6		ZW 550-6			
VOLVO	L 220H		L 350H			
LIEBHERR	L 586 X-Power					
KOMATSU			WA 500-7			
LE TOURNEAU						
					L 950	

## Oryx Products

Type	Adaptor	Tooth / Point	Wear Cap	Looking Device
32	1560-32	32 AA	-	800 CL + 32 RD
34	1570-34 / 1580-34 / 1590-34	34 AA	34 PA	34 CL + 34 RD