


BLADE SHROUD



PROTECTION DE LAME

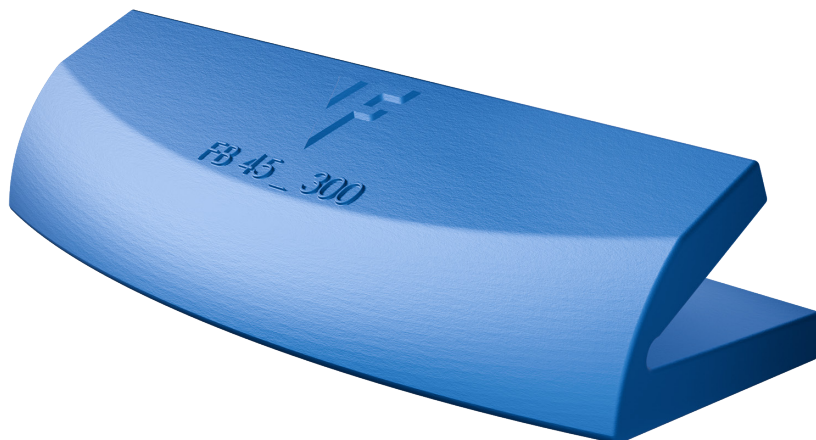

WELD-ON TURNKEY BLADE SHROUD

Protection de lame à souder TURNKEY

FB TK

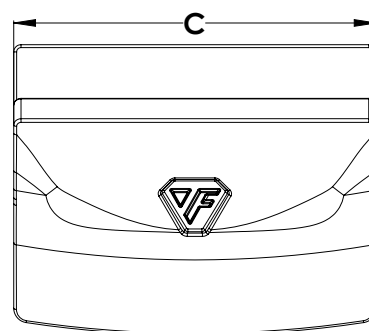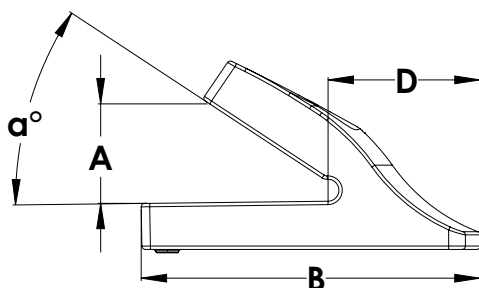

CODE Référence	WEIGHT (kg/lb)	DIMENSIONS (mm/inch)					
		A	B	C	D	α°	Blade
FB 45 300 TK	9,60 / 21,16	45 / 1,77	192 / 7,56	300 / 11,81	100 / 3,94	30°	0°
FB 60 200 TK	21,00 / 46,30	62 / 2,44	275 / 10,83	200 / 7,87	120 / 4,72	30°	0°
FB 60 200 L TK	27,60 / 60,85	62 / 2,44	275 / 10,83	200 / 7,87	120 / 4,72	30°	14°
FB 60 200 R TK	27,60 / 60,85	62 / 2,44	275 / 10,83	200 / 7,87	120 / 4,72	30°	14°
FB 60 250 TK	27,10 / 59,75	62 / 2,44	275 / 10,83	250 / 9,84	120 / 4,72	30°	0°
FB 60 300 TK	32,20 / 70,99	62 / 2,44	275 / 10,83	300 / 11,81	120 / 4,72	30°	0°
FB 60 350 TK	37,70 / 83,11	62 / 2,44	275 / 10,83	350 / 13,78	120 / 4,72	30°	0°
FB 70 Tk	18,00 / 39,68	70 / 2,76	230 / 9,06	250 / 9,84	115 / 4,53	30°	0°
FB 70 L TK	13,00 / 28,66	70 / 2,76	230 / 9,06	200 / 7,87	115 / 4,53	30°	14°
FB 70 R Tk	13,00 / 28,66	70 / 2,76	230 / 9,06	200 / 7,87	115 / 4,53	30°	14°
FB 70 250 TK	27,10 / 59,75	72 / 2,83	290 / 11,42	250 / 9,84	120 / 4,72	30°	0°
FB 90 TK	30,00 / 66,14	90 / 3,54	210 / 8,27	360 / 14,17	100 / 3,94	30°	0°

