




Bucket equipment
for construction

ADAPTOR



ADAPTEUR

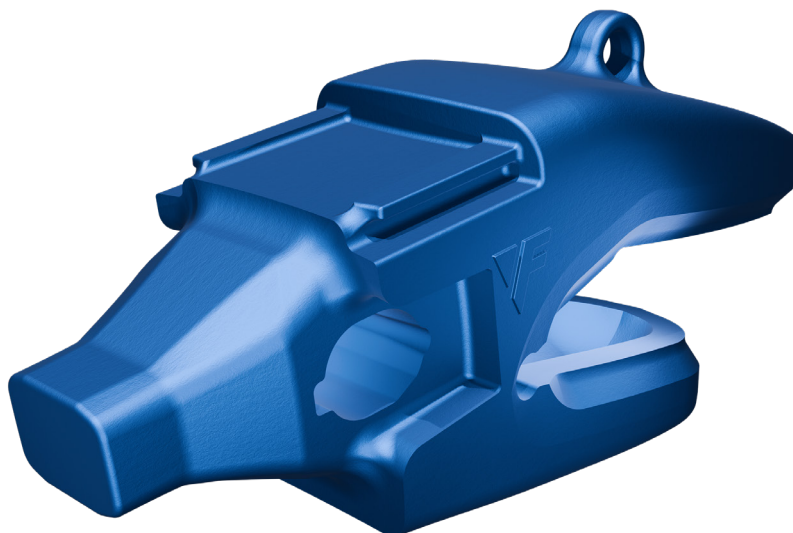

ABRASION - 16°

Abrasion - 16°

TYPE 18 - 16

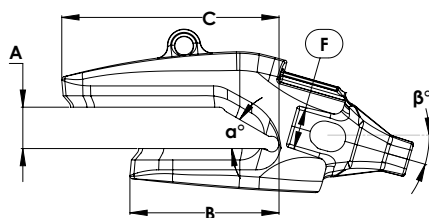

SIZE Taille	CODE Référence	WEIGHT (kg/lb)	DIMENSIONS (mm/inch)							
			A	B	C	F	L	α°	β°	$^*\Delta^\circ$
10	TKN10 1850 A16°	32,0 / 70,55	52 / 2,05	160 / 6,30	245 / 9,65	67 / 2,64	150 / 5,91	30°	16°	/
	TKN10 1860 A16°	32,0 / 70,55	64 / 2,52	160 / 6,30	235 / 9,25	67 / 2,64	150 / 5,91	30°	16°	/
11	TKN11 1860 A16°	47,0 / 103,62	62 / 2,44	202 / 7,95	281 / 11,06	70 / 2,76	170 / 6,69	30°	16°	/
	TKN11 1870 A16°	47,0 / 103,62	72 / 2,83	183 / 7,20	281 / 11,06	70 / 2,76	170 / 6,69	30°	16°	/
13	TKN13 1870 A16°	77,0 / 169,76	72 / 2,83	245 / 9,65	365 / 14,37	77 / 3,03	190 / 7,48	30°	16°	/
	TKN13 1880 A16°	76,5 / 168,65	84 / 3,31	245 / 9,65	365 / 14,37	77 / 3,03	190 / 7,48	30°	16°	/
	TKN13 1880 A16° L	77,3 / 170,42	84 / 3,31	245 / 9,65	365 / 14,37	77 / 3,03	190 / 7,48	30°	16°	15°
	TKN13 1880 A16° R	77,3 / 170,42	84 / 3,31	245 / 9,65	365 / 14,37	77 / 3,03	190 / 7,48	30°	16°	15°
	TKN13 1890 A16°	75,0 / 165,35	94 / 3,70	245 / 9,65	365 / 14,37	77 / 3,03	190 / 7,48	30°	16°	/
15	TKN15 1890 A16°	109,0 / 240,30	95 / 3,74	270 / 10,63	430 / 16,93	87 / 3,43	210 / 8,27	30°	16°	/
	TKN15 18100 A16°	104,0 / 229,28	104 / 4,09	245 / 9,65	410 / 16,14	87 / 3,43	210 / 8,27	30°	16°	/

* Δ : delta blade angle

FEURST - BD DE LA BOISSONNETTE - 42110 FEURS - FRANCE - TEL +33 (0)4 77 27 40 63
WWW.TURNKEYTEETH.COM - TECHNICAL-SERVICES@SAFE-FEURST.FR

